


C SERIES CLEAN CUTTER

Hydraulic clean cutters are used to process waste wood, waste plastic, tires and light gauge steel.

Cuts two surfaces of material at once

Reduces cutting resistance by adopting an asymmetrical frame

The C series gives the operator good visibility for easy operation

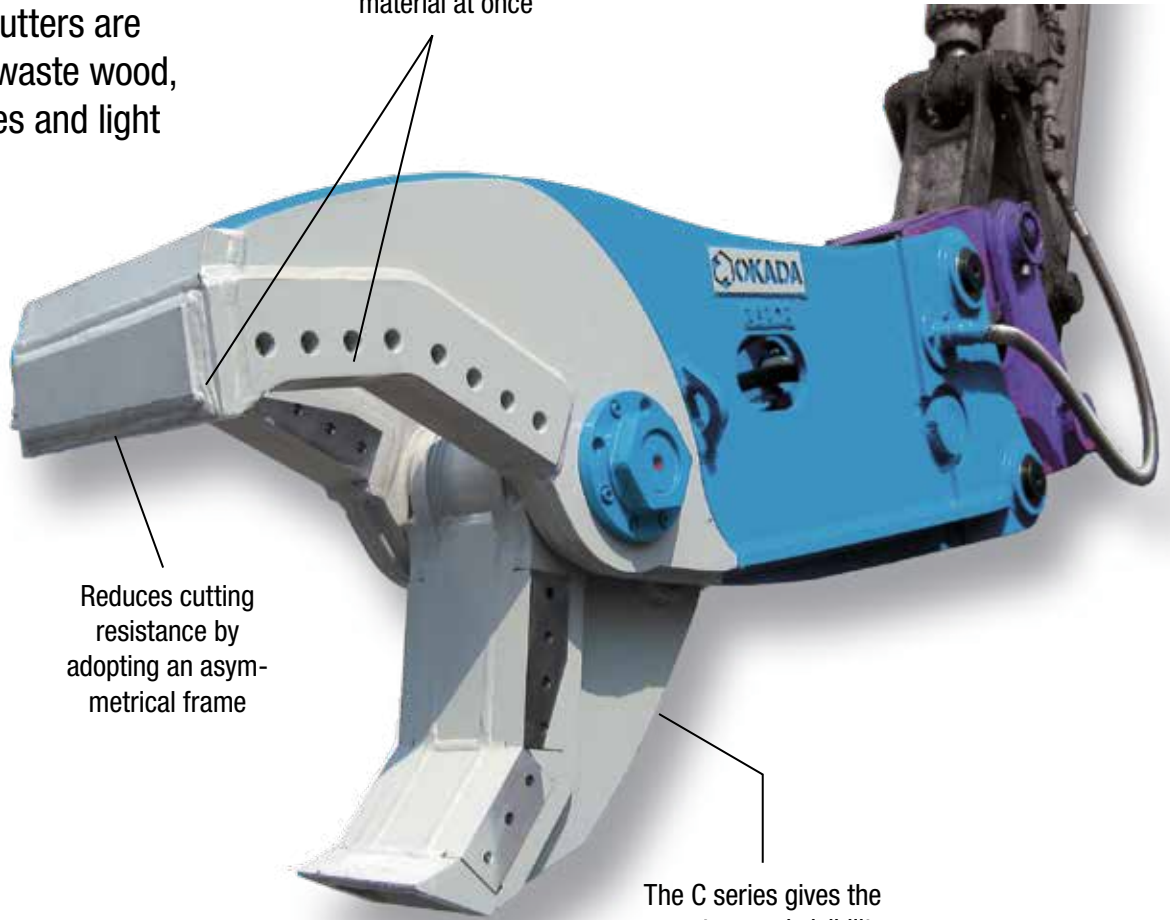

SPECIFICATIONS

		C-100	C-200
Operating weight	lbs	2128	3087
	kg	965	1400
Oil flow	gpm	26-53	53-106
	lpm	100-200	200-400
Operating pressure	psi	4600	4600
	bar	320	320
Overall length	inches	67.9	76.6
	mm	1725	1945
Max. claw opening	inches	23.8	27.8
	mm	605	705
Ripping blade length	inches	9.6 / 17.3	10.8 / 19.5
	mm	245 / 440	275 / 495
Cutter blade length	inches	15.7 / 18.1	18.1 / 21.7
	mm	400 / 460	460 / 550
Crushing force	US tons	42.7	80.9
	kN	380	720
Carrier weight range	1000 lbs.	22-28	40-46
	metric tons	10-13	18-21

Specifications are subject to change without notice and assume the use of an Okada universal pin mount.